
MATERIALS AND COLORS

STEPS

- Solid beech wood, 1'5/8" (40 mm) thickness
- No knots or splits, maximum stability and mechanical strength thanks to Finger Joint technology
- Non-toxic water-based coating: 3 layers of paint

HANDRAIL

• In plastic material matching the colour of the structure

STRUCTURE

- Steel modular elements
- Powder coated with matt scratch proof finish

RAILING

Painted steel vertical rails matching the colour of the structure

Wood colour (steps)




Steel colour (structure and railing)



CONFIGURATIONS

SQUARE OPENING

ROUND OPENING

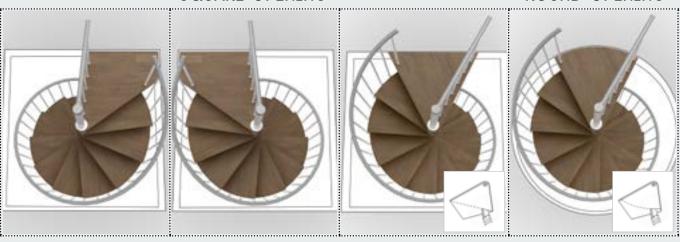


UNIVERSAL LANDING WITH 60° OPENING: adaptable to any opening during installation

PACKAGE

1 box =

1 complete staircase of 13 steps (landing included)


Structure, steps, railing, handrail



The measures of the box may vary

MEASUREMENTS valid for all the configurations

The SYSTEM FOR ADJUSTING THE HEIGHT BETWEEN THE STEPS (RISE) allows you to:

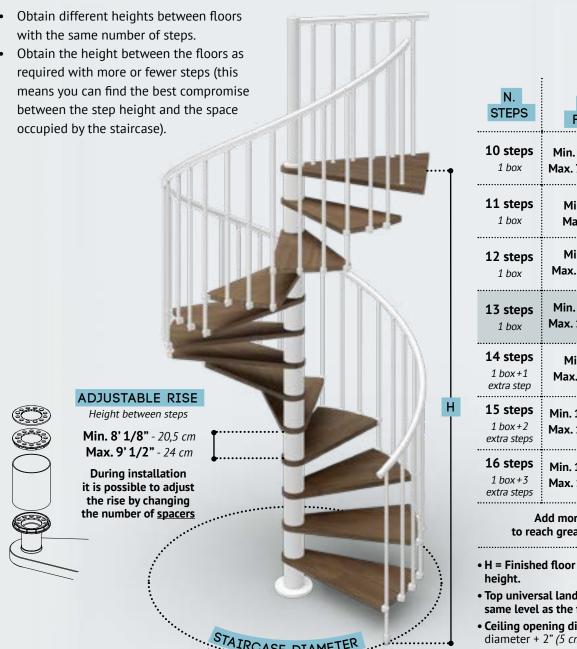

105 - 120 - 140 - 160 - 180 cm

	HEIGHT
N.	BETWEEN
STEPS	FLOORS (H)
10 steps	Min. 6' 8 3/4" - 205 cm
1 box	Max. 7' 10 1/2" - 240 cm
11 steps	Min. 7' 5" - 226 cm
1 box	Max. 8' 8" - 264 cm
12 steps	Min. 8' 1" - 246 cm
1 box	Max. 9' 5 3/8" - 288 cm
	•
13 steps	Min. 8' 9 1/8" - 267 cm
13 steps	Min. 8' 9 1/8" - 267 cm Max. 10' 2 7/8" - 312 cm
-	
1 box	Max. 10' 2 7/8" - 312 cm
1 box 14 steps 1 box+1	Max. 10' 2 7/8" - 312 cm Min. 9' 5" - 287 cm
1 box 14 steps 1 box+1 extra step	Max. 10' 2 7/8" - 312 cm Min. 9' 5" - 287 cm Max. 11' 1/4" - 336 cm
1 box 14 steps 1 box+1 extra step 15 steps 1 box+2	Max. 10' 2 7/8" - 312 cm Min. 9' 5" - 287 cm Max. 11' 1/4" - 336 cm Min. 10' 1 1/4" - 308 cm

Add more steps to reach greater heights.

- H = Finished floor to finished floor
- · Top universal landing fixed at the same level as the finished upper floor.
- Ceiling opening diameter: staircase diameter + 2" (5 cm).

DIRECTION OF ASCENT

Clockwise Counter clockwise





ACCESSORIES

